


Product Data Sheet

Grounding Set for solder free paper insulated cables

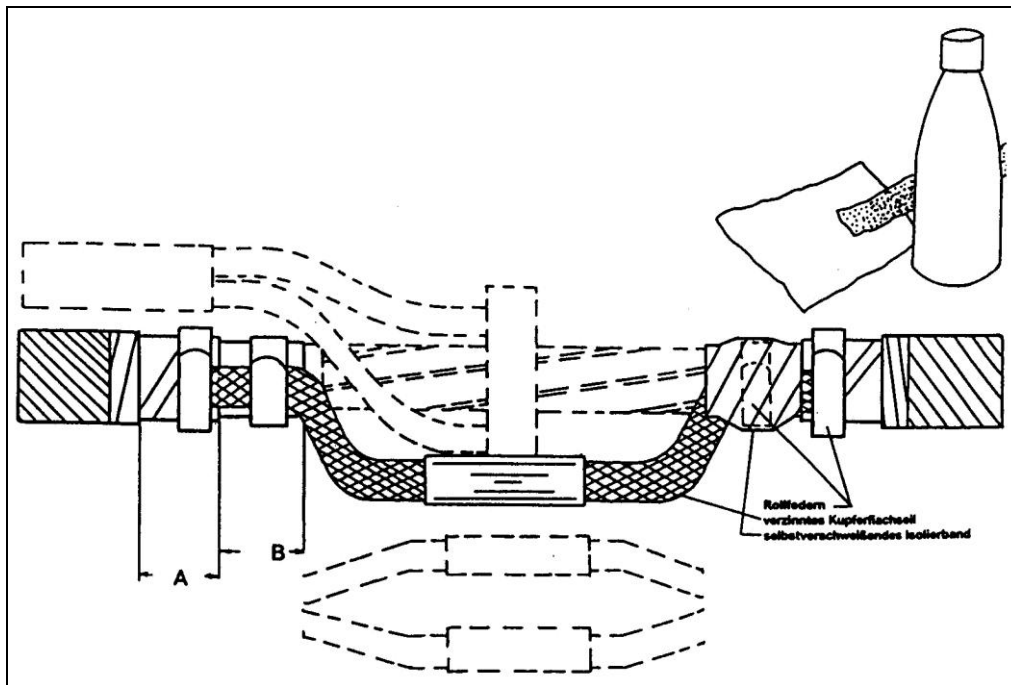

allocation table		dimensions in mm	
Type	A	B	usable for main cable:
Type 1	40	40	N(A)KBA till 4 x 70 mm ²
Type 2	40	50	N(A)KBA till 4 x 150 mm ²
Type 3	50	60	N(A)KBA till 4 x 240 mm ²

Scope of delivery

Flexible earthing lead adapted for each type concerning diameter and length, 4 scroll springs, self-welding insulating tape, mounting accessories

Mounting

Remove cable armour and lead coating.

Flexible earthing lead is conducted connected via scroll spring with lead coating and steel reinforcement.

Lead coating is wrapped twice in self-welding insulating tape.

The whole junction should fit into a cable box and has to be completely potted with sealing compound.